

SUPERtrol-I LE

Economical Flow Totalizer, Ratemeter and Batcher

Features

- EZ Setup Feature Speeds Instrument Setup
- Setup Diskette
- Advanced Batching Features, Including Quick Batching Sequence
- Menu Selectable Hardware Features
- Two Line LCD, OLED or VFD Display
- 0-20mA or 4-20mA Analog Output
- Attractive Wall Mount Enclosure Option
- Isolated Pulse Output Standard
- RS-232 Port Standard, RS-485 Modbus RTU Optional
- Internal Communication Card Option
Supports: BACnet IP, BACnet MS/TP, Metasys N2, Modbus TCP, AB Ethernet IP, AB DF1, LonWorks*
- Advanced Printing Capabilities
- Data Logging & Modern Remote Metering Support
- DIN Enclosure with Two Piece Connectors
- DDE Server & HMI Software Available



Description:

The SUPERtrol-I LE Flow Computer satisfies the instrument requirements for a variety of pulse producing flowmeter types in liquid applications.

The alphanumeric display shows measured and calculated parameters in easy to understand format. Single key direct access to measurements and display scrolling is supported. An EZ Setup feature rapidly guides the user through the basic setup.

The SUPERtrol-I LE can be programmed for rate/total indication or batching. The various pulse inputs and outputs can be "soft" assigned to meet a variety of common application needs. The user "soft selects" the usage of each feature while configuring the instrument. A 0-20mA or 4-20mA analog output is standard.

The user can assign the standard RS-232 Serial Port for data logging, transaction printing, or for connection to a modem for remote meter reading. An optional RS-485 serial port using Modbus RTU protocol is available. An optional Ethernet port is available for BACnet IP, BACnet MS/TP, Metasys N2, Modbus TCP, AB Ethernet IP, AB DF1, LonWorks*.

A Service or Test mode is provided to assist the user during start-up system check out by monitoring inputs and exercising outputs. The system setup can also be printed.

* LonWorks protocol requires a different module assembly from the other available protocols. LonWorks is not field selectable.

Specifications

Environmental

Operating Temperature: 0°C to +50°C

Storage Temperature: -40°C to +85°C

Humidity : 0-95% Non-condensing

Materials: U.L. approved

Listing: UL/C-UL Listed (File No. E192404), CE Compliant

Display

Type: 2 lines of 20 characters

Types: Backlit LCD, OLED and VFD ordering options

Character Size: 0.2" nominal

User programmable label descriptors and units of measure

Keypad

Keypad Type: Membrane Keypad with 16 keys

Keypad Rating: Sealed to NEMA 4X / IP65

Enclosure

Depth behind panel: 6.5" including mating connector

Type: DIN

Materials: Plastic, UL94V-0, Flame retardant

Bezel: Textured per matt finish

Power Input

The factory equipped power option is internally fused. An internal line to line filter capacitor and MOV are provided for added transient suppression.

110 VAC Power Option: 85 to 127 Vrms, 50/60 Hz

220 VAC Power Option: 170 to 276 Vrms, 50/60 Hz

DC Power Option:

12 VDC (10 to 14 VDC)

24 VDC (14 to 28 VDC)

Flow Inputs:**Pulse Inputs:**

Number of Flow Inputs: one (single or quadrature)
 Input Impedance: 10 K Ω nominal
 Pullup Resistance: 10 K Ω to 5 VDC (menu selectable)
 Pull Down Resistance: 10 K Ω to common
 Trigger Level: (menu selectable)
 High Level Input
 Logic On: 3 to 30 VDC
 Logic Off: 0 to 1 VDC
 Low Level Input (mag pickup)
 Sensitivity:
 10 mV or 100 mV
 Minimum Count Speed:
 User selectable (as low as 1 pulse/99 seconds)
 Maximum Count Speed:
 Selectable: 40 Hz, 3000 Hz or 20kHz
 Overvoltage Protection: 50 VDC
 Linearization: Average K or 16 Point linearization with
 separate forward and reverse tables

Control Inputs

Number of Inputs: 3
 Switch Inputs are menu selectable for Start, Stop, Reset, Lock,
 Inhibit, Alarm Acknowledge, Print or Not Used.
 Control Input Specifications
 Input Scan Rate: 10 scans per second
 Logic 1: 4 - 30 VDC
 Logic 0: 0 - 0.8 VDC
 Input Impedance: 100 K Ω
 Control Activation:
 Positive Edge or Pos. Level based on product definition for
 switch usage.

Excitation Voltage

Menu Selectable: 5, 12 or 24 VDC @ 100 mA (fault protected)

Data Logging

The data logger captures print list information to internal
 storage for approximately 1000 transactions. This information
 can be used for later uploading or printing. Storage format is
 selectable for Comma-Carriage Return or Printer formats.

Batching Features

Quick batching sequence, single or dual stage batching, slow
 fill, auto-batch restart and batch overrun compensation.

Serial Communication

The serial port can be used for printing, data logging, modem
 connection and communication with a computer.

RS-232:

Device ID: 01-99
 Baud Rates: 300, 600, 1200, 2400, 4800, 9600, 19200
 Parity: None, Odd, Even
 Handshaking: None, Software, Hardware
 Print Setup: Configurable print list and formatting.
 Print Out: Custom form length, print headers, print list.
 Print Initialization: Print on end of batch, key depression,
 interval, time of day or remote request.

RS-485: (optional 2nd COM port)

Device ID: 01-247
 Baud Rates: 1200, 2400, 4800, 9600, 19200
 Parity: None, Odd, Even
 Protocol: Modbus RTU (Half Duplex)

**Internal Multi-protocol Communication Card Option
(Network Card Option 3)**

Protocols:
 BACnet MS/TP, BACnet IP, Modbus TCP,
 Metasys N2, AB DF1, AB EtherNet/IP, LonWorks

Relay Outputs

The relay outputs are menu assignable to (Individually for each
 relay) Low Rate Alarm, Hi Rate Alarm, Prewarn Alarm, Preset
 Alarm or General purpose warning (security).

Number of relays: 2 (4 optional)
 Contact Style: Form C contacts
 Contact Ratings: 5 amp, 240 VAC or 30 VDC

Isolated Pulse output

The isolated pulse output is assigned to Uncompensated
 Volume Total.

Pulse Output Form: Photomos Relay
 Maximum On Current: 25 mA
 Maximum Off Voltage: 30 VDC
 Saturation Voltage: 1.0 VDC
 Maximum Off Current: 0.1 mA
 Pulse Duration: 10 mSec or 100mSec (user selectable)
 Pulse output buffer: 256
 Fault Protection
 Reverse polarity: Shunt Diode

Isolated Analog Output

The analog output is menu assignable to correspond to the
 Rate or Total.

Type: Isolated Current Sourcing
 Available Ranges: 4-20 mA, 0-20 mA
 Resolution: 12 bit
 Accuracy: 0.05% FS at 20° C
 Update Rate: 1 update/sec minimum
 Temperature Drift: Less than 200 ppm/C
 Maximum Load: 1000 ohms (at nominal line voltage)
 Compliance Effect: Less than .05% Span
 60 Hz rejection: 40 dB minimum
 Calibration: Operator assisted Learn Mode
 Averaging: User entry of damping constant to cause a
 smooth control action

Note: DC powered units are not isolated

Internal Multi-protocol Communication Card Option

FEATURES

- Internal communication card eliminates the need for external protocol converters.
- Supports: BACnet IP, BACnet MS/TP, Metasys N2, Modbus TCP, AB Ethernet IP, AB DF1, LonWorks*
- Easy to configure via the Web Interface.
- Dedicated internal LonWorks is also available
- Dedicated internal RS485 Modbus RTU is also available


DESCRIPTION

The multi-protocol communication card is an internal, high performance, Building Management System communication solution for the ST1 flow computer family. The card provides an instant interface, enabling the KEP flow computers to communicate with multiple BMS protocols, including:

- BACnet MS/TP
- BACnet IP
- Modbus TCP
- Metasys N2
- AB DF1
- AB EtherNet/IP
- LonWorks*

CONFIGURATION

Use a web browser to locate the internal web page and configure the settings. The detailed settings vary with the different communication protocols. Only one communication port/protocol can be used. A web browser is also used to configure the site specific settings for each instrument

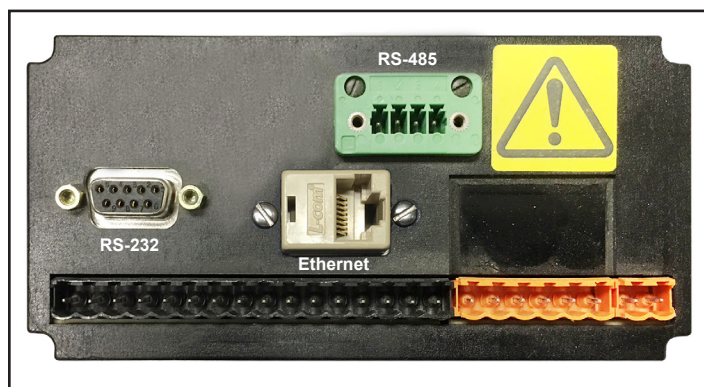

*Rear view of ST1LE case.
Communication ports are available for RS-485 and Ethernet*

* LonWorks protocol requires a different module assembly from the other available protocols. LonWorks is not field selectable.

The Web Interface makes it easy to configure

Configuration Parameters

Parameter Name	Parameter Description	Value	
protocol_select	Protocol Selector Set to 1 for BACnet IP Set to 2 for BACnet MSTP Set to 3 for Metasys N2 Set to 4 for Modbus TCP Set to 5 for EtherNet/IP Set to 6 for DF1	<input type="text" value="1"/>	Submit
node_offset	BACnet Node Offset This is used to set the BACnet device instance. The device instance will be sum of the Modbus device address and the node offset. (0 - 4194303)	<input type="text" value="50000"/>	Submit
bac_ip_port	BACnet IP Port This sets the BACnet IP port of the Gateway. The default is 47808. (1 - 65535)	<input type="text" value="47808"/>	Submit
bac_cov_option	BACnet COV This enables or disables COVs for the BACnet connection. Use COV_Enable to enable. Use COV_Disable to disable. (COV_Enable/COV_Disable)	<input type="text" value="COV_Disable"/>	Submit
bac_bbmd_option	BACnet BBMD This enables BBMD on the BACnet IP connection. Use BBMD to enable. Use - to disable. The bdt.ini files also needs to be downloaded. (BBMD/-)	<input type="text" value="-"/>	Submit

Active profiles

Nr	Node ID	Current profile	Parameters
1	1	BAC_IP_SUPERtrol_II	Remove
Add			

Sample screen shot of web interface configuration

Fig. 1: Standard Dimensions


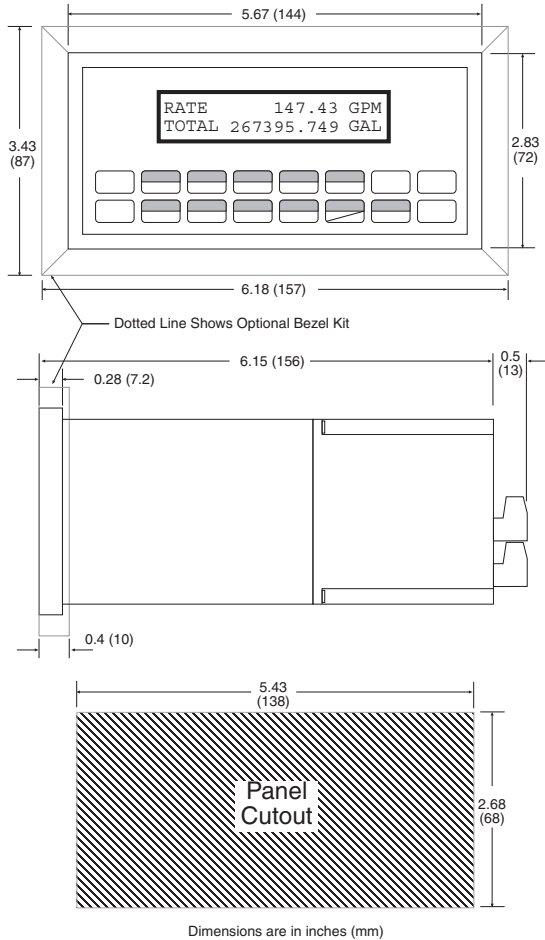


Fig. 2: Wall Mount ("W" mounting option) Dimensions

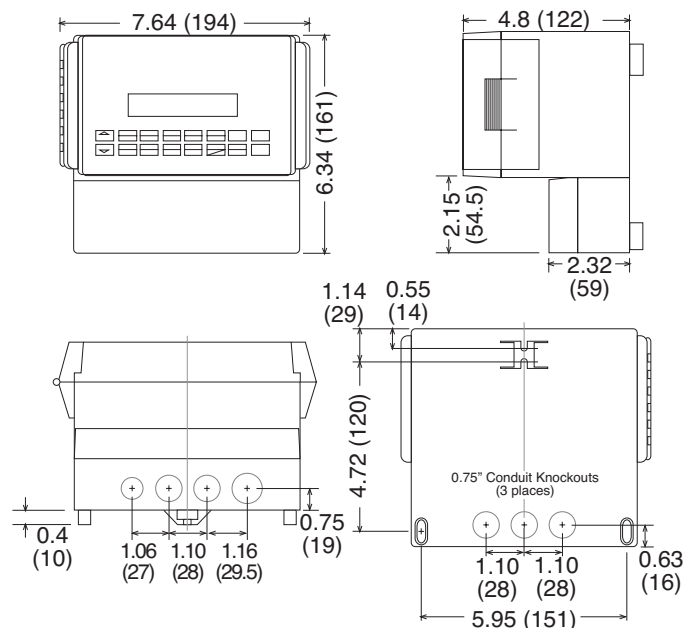

Terminal Designations

1	DC OUTPUT	FLOW IN		
2	PULSE IN 1			
3	PULSE IN 2			
4	COMMON			
5	DO NOT USE			
6	DO NOT USE			
7	DO NOT USE			
8	DO NOT USE			
9	CNTR IN 1	SEE USER MANUAL		
10	CNTR IN 2			
11	CNTR IN 3			
12	COMMON			
13	PULSE OUTPUT +			
14	PULSE OUTPUT -			
15	ANALOG OUTPUT +			
16	ANALOG OUTPUT -			
17	NC		25	NC
18	COM RLY1		26	COM RLY3
19	NO	27	NO	
20	NC	28	NC	
21	COM RLY2	29	COM RLY4	
22	NO	30	NO	
23	AC LINE	DC +	POWER IN	
24	AC LINE	DC -		

Ordering Information

Example ST1LE L 1 A 0 P ET

Series: ST1LE = SUPERtrol-I LE

Display Type:
L= LCD
O= OLED
V= VFDInput Type:
1= 110 VAC
2= 220 VAC
3= 12 VDC (10 to 14 VDC)
4= 24 VDC (14 to 28 VDC)Relays:
A= 2 SPDT Relays
B= 4 SPDT RelaysNetwork Card:
0= None (STD)
2= RS485/Modbus (optional 2nd COM port)
3= COM CARD with Multi-Protocol
Specify protocol (example: 3 BAC/IP)
BAC/IP = BACnet IP
BACMS/TP = BACnet MS/TP
MOD/IP = Modbus TCP/IP
METASYS/N2 = Metasys N2
ABDF1 = AB DF1
ABETH/IP = AB EtherNet/IP
4= COM CARD with LonWorks Protocol
Specify protocol (example: 4 LONWORKS)
Factory configuration of network card settingsMounting:
P= Panel Mount(see Fig. 1)
N= NEMA 4 Wall Mount(see MS811)
W= NEMA 12/13 Wall Mount w/ Clear Cover(see Fig. 2)
E= Explosion Proof (No Button Access)(see XHVD 7/4)Options:
TB = RS485 Terminal Block for Panel Mount Enclosure
for Network Card Option 2 (RS485)
ET = Extended Temperature (consult factory)
-4°F to 131°F (-20°C to 55°C)
IM = Internal Modem
M = Modem Power Option

Accessories:

OPC/DDE Server for RS232 Port available, see EX5-UCOND-NA00
OPC/DDE Server for Modbus Suite available, see EX5-MDBUS-NA00
Modem Available, see MPP-2400N
Serial printer available, see P20, P220, P295
Ethernet Port Server available, see IEPS
RS-422/485 to RS-232 Communication Adapter available, see CA285
RS232 Extender Cable: P/N=13220-<length in inches>
Remote metering and data collection software available, see TROLLink