

ST1 NET FC

Net Rate/Total Flow Computer for Liquid Applications

Features

- Displays Supply, Return and Net/Rate Total
- Supports Pulse Producing Flowmeters Turbine, Positive Displacement, Coriolis
- Volume, Corrected Volume or Mass Equation
- Universal Viscosity Curve (UVC) and Strouhal/Roshko Advanced Linearization Methods
- API 2540 Equations for Petroleum Fluids
- User Entry of Fluid Properties (10 Selectable)
- Menu Selectable Hardware & Software Features
- Data Logging of Rate/Total Over Wide Range
- Two Line LCD, OLED or VFD Display
- Isolated Pulse and Analog Outputs Standard
- RS-232 Port Standard, RS-485 Optional
- Auxiliary Energy Totalizer Available on Special Order
- Windows™ Setup Software
- DDE/OPC Server & HMI Software Available



Net Liquid Application

Measurements:

Flowmeter sensors measure the actual flow in the supply and return liquid lines. A temperature sensor can also be installed to correct for UVC or STRO linearization of turbine flowmeters.

Calculations:

- Supply and return flow is calculated using the flowmeter frequency output and the user entered K-Factor.

Net Flow = Supply Flow – Return Flow


NOTE: Additional calculations are used for Corrected Volume and Mass applications

Output Results:

- Display Results
 - Supply, Return, Net Flow Rates, Resettable Totals, Non-Resettable Totals
- Analog Output
 - Net Rate or Net Total
- Pulse Output
 - Net Total
- Relay Outputs
 - Net Rate or Net Total Alarms

Applications:

The Flow Computer can monitor actual net flow and total of any liquid. (Common applications include boiler and diesel engine fuel consumption measurement) Flow alarms are provided via relays and datalogging is available via analog (4-20mA) and serial outputs.

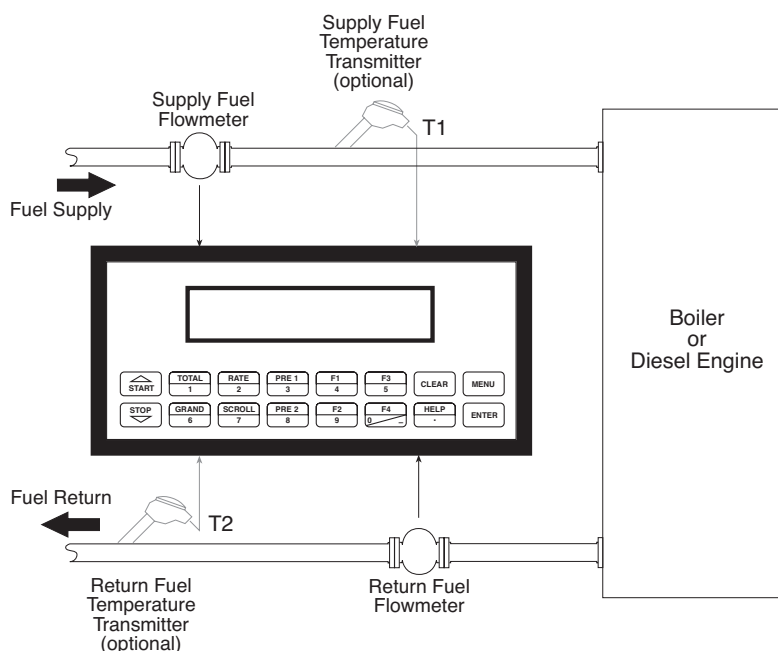

Calculations

Pulse Input; Average K-Factor

$$\text{Supply or Return Flow} = \frac{\text{input frequency} \cdot \text{time scale factor}}{\text{K-Factor}}$$

$$\text{Net Flow} = \text{Supply Flow} - \text{Return Flow}$$

Specifications:**Flow Meters and Computations**

Meter Types: Supports pulse producing meters including: vortex, single rotor turbine, magnetic, PD flowmeter, Coriolis
 Linearization: 40 point table, UVC table or Strouhal/Roshko
 Computations: Volume, Corrected Volume & Mass
 Fluid Computations: Density, Temperature, Viscosity in Supply and Return

Environmental

Operating Temperature: 0°C to +50°C
 Storage Temperature: -40°C to +85 C
 Humidity : 0-95% Non-condensing
 Materials: U.L. approved

Approvals: CE Compliant, UL/CUL Listed

Display

Type: 2 lines of 20 characters, Backlit LCD, OLED or VFD
 Character Size: 0.2" nominal
 User programmable label descriptors and units of measure

Keypad

Keypad Type: Membrane Keypad with 16 keys
 Keypad Rating: Sealed to NEMA 4X / IP65

Enclosure

Size: See Dimensions
 Depth behind panel: 6.5" including mating connector
 Type: DIN
 Materials: Plastic, UL94V-0, Flame retardant
 Bezel: Textured per matt finish

Fluid Types

General Purpose, User entry of fluid properties for up to 10 fluids.

Real Time Clock

The ST1-NET-FC is equipped with a battery backed real time clock with display of time and date.
 Format:
 12 or 24 hour time display
 Day, Month, Year date display

Excitation Voltage

Menu Selectable: 5, 12 or 24 VDC @ 100 mA (fault protected with self resetting fuse)

Relay Outputs

The relay outputs are menu assignable to (Individually for each relay) Low Rate Alarm (net rate or net total), Hi Rate Alarm (net rate or net total), Temperature, Density or General purpose warning (security).
 Number of relays: 2 (4 optional)
 Contact Style: Form C contacts
 Contact Ratings: 5 amp, 240 VAC or 30 VDC
 Capabilities: Alarm Delay, Setpoint, Hysteresis, Duration

Power Input

The factory equipped power option is internally fused. An internal line to line filter capacitor and MOV are provided for added transient suppression.

110 VAC Power: 85 to 127 Vrms, 50/60 Hz

220 VAC Power: 170 to 276 Vrms, 50/60 Hz

DC Power:

12 VDC (10 to 14 VDC)

24 VDC (14 to 28 VDC)

Power Consumption:

AC: 11.0 VA (11W)

DC: 300 mA max.

Flow Inputs:**Pulse Inputs:**

Number of Flow Inputs: 2, one for supply and one for return
 Input Impedance: 10 K Ω nominal
 Pullup Resistance: 10 K Ω to 5 VDC (menu selectable)
 Pull Down Resistance: 10 K Ω to common
 Trigger Level: (menu selectable)
 High Level Input
 Logic On: 3 to 30 VDC
 Logic Off: 0 to 1 VDC
 Low Level Input (mag pickup)
 Sensitivity:
 10 mV or 100 mV
 Minimum Count Speed:
 Menu selectable: 1-99 seconds
 Maximum Count Speed:
 Menu Selectable: 40Hz, 3000Hz or 20 kHz
 Overvoltage Protection: 50 VDC

Control Inputs

Switch Inputs are menu selectable for Reset, Lock, Inhibit, Alarm Acknowledge, Print, Aux. Energy Total input or Not Used.
 Control Input Specifications
 Number of Control Inputs: 3
 Input Scan Rate: 10 scans per second
 Logic 1: 4 - 30 VDC
 Logic 0: 0 - 0.8 VDC
 Input Impedance: 100 K Ω
 Control Activation:
 Positive Edge or Pos. Level based on product definition for switch usage.

Auxiliary / Compensation Inputs

The auxiliary/compensation inputs are menu selectable for supply temperature, return temperature or not used. These inputs are used for the compensated inputs when performing compensated flow calculations. They can also be used as a general purpose input for display and alarming.
 Number of inputs: 2

Operation: Ratiometric

Accuracy: 0.02% FS at 20° C

Basic Measurement Resolution:
 16 bit

Update Rate: 1 update/sec minimum

Automatic Fault detection:

Signal Over-range/under-range

Current Loop Broken

Fault mode to user defined default settings

Fault Protection:

Reverse Polarity: No ill effects

Over-Voltage Limit (Voltage Input): 50 VDC

Available Input Ranges

Current (Two): 4-20 mA, 0-20 mA

RTD: (One) 100 Ohm DIN RTD Standard Three Wire

Thermistor (One) - Consult Factory

Isolated Analog Output

The analog output is menu assignable to correspond to the Net Rate/Total, Supply Temperature, Supply Density.

Type: Isolated Current Sourcing

Available Ranges: 4-20 mA, 0-20 mA

Resolution: 12 bit

Accuracy: 0.05% FS at 20° C

Update Rate: 1 update/sec minimum

Temperature Drift: Less than 200 ppm/C

Maximum Load: 1000 ohms (at nominal line voltage)

Compliance Effect: Less than .05% Span

60 Hz rejection: 40 dB minimum

Calibration: Operator assisted Learn Mode

Averaging: User entry of damping constant to cause a smooth control action

Isolated Pulse output

The isolated pulse output is menu assignable to Net Total.

Pulse Output Form: Photo MOS Relay

Maximum On Current: 100 mA

Maximum Off Voltage: 30 VDC

Saturation Voltage: 1.0 VDC

Maximum Off Current: 0.1 mA

Pulse Duration: 10 mSec or 100 mSec (user selectable)

Pulse output buffer: 256

Fault Protection

Reverse polarity: Shunt Diode

Serial Communication

The serial port can be used for printing, data recording, and/or communication with a computer.

RS-232:

Device ID: 01-99

Baud Rates: 300, 600, 1200, 2400, 4800, 9600, 19200

Parity: None, Odd, Even

Handshaking: None, Software, Hardware

Print Setup: Configurable print list and formatting

RS-485: (optional 2nd COM port)

Device ID: 01-247

Baud Rates: 2400, 4800, 9600, 19200

Parity: None, Odd, Even

Protocol: Modbus RTU (Half Duplex)

Setup Diskette Capabilities

Capabilities include: View Live Results Configure unit, Upload and Download to unit, Load and Save to file, Print Setup,

Data Logging Capabilities

Capabilities:

Permits unit to automatically gather data during use.

Data Log List:

User selectable: includes Supply/Return Temperatures, Supply/Return Density, Supply/Return Viscosity, Supply, Return and Net Ratemeters/Totalizers, Grand Totalizer, Time and Date, Fluid, Setpoint 1 & 2, Frequency 1 & 2, K-Factor 1 & 2.

Data Log Event Trigger:

selectable: includes interval, time of day, front key, external contact, end of batch

Data Log Format:

selectable: Printer format, Database CSV format

Data Transmission:

Selectable: Output may be transmitted immediately or held in data log for later polling

Remote Request Capabilities include:

Send data log, clear data log

External Modem Support Capabilities:

Compatibility: Hayes Compatible

Polling Capabilities:

Answers incoming calls, responds to requests for information of action

Call Out Capabilities:

Can initiate call on user selectable event condition, or upon error

Error Handling:

Supports multiple retry, automatic disconnect upon loss of line or remote inactivity

